

Access & Power Integration Solution for Rhombus



Altronix T2CRK7F8SD kit consists of Trove2 enclosure, TCV2 backplane with one (1) 24VDC @ 10A power supply/charger, one (1) eight (8) PTC protected dual input/output access control module, one (1) 12VDC voltage regulator and one (1) eight (8) PTC protected dual input/output power distribution module. This kit also accommodates up to two Rhombus DC20M for up to eight (8) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.





Rhombus boards are not included

Key Features

- 24VDC power supply/charger
- Accommodates two (2) Rhombus DC20M modules
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown
- Enclosure accommodates up to four (4) 12VDC/12AH batteries

- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 Access Control System
 - cUL: CAN/ULC s319-05 Electronic Access Control Systems
 - CE European Conformity
- Lifetime Warranty*

^{*}Altronix Power Supply/Chargers and Sub-Assemblies only



T2CRK7F8SD (Kit) -

Access & Power Integration Solution for Rhombus



Specifications -

Power Supply/Charger (eFlow104NB):

Input

Voltage 120VAC, 60Hz, 4.5A max.

Input Fuse 6.5A/250V

Outputs

Voltage 24VDC

Current 10A continuous

Auxiliary Class 2 power-limited @ 1A (unswitched)

Other Overvoltage protection. Filtered and regulated

Battery Charging

Capacity 12AH/12VDC (4 within enclosure)

40AH/65AH (requires separate enclosure)

Type Sealed lead acid or gel type
Failover Upon AC loss, instantaneous

Batteries are sold separately

Fire Alarm Disconnect

Supervised Latching or non-latching

EOL 10K Resistor

Supervision

AC Failure Form "C" contacts
Battery Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below

70-75% for 24V units. Prevents deep battery discharge

Indicators (LED)

Input 120VAC is present

DC Output Powered

Dual Input Access Power Controller (ACMS8CB):

Input

Voltage 24VDC from eFlow104NB and 12VDC from VR10

Input PTCs 9/

Outputs

Voltage 12VDC and/or 24VDC Eight (8) selectable independently controlled outputs or eight (8) indepently controlled Form "C" relay outputs:

a) Fail-Safe and/or Fail-Secure power outputs

b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated

c) Auxiliary power outputs (unswitched)

d) Any combination of the above

Any of the eight (8) PTC protected power outputs are selectable

to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output PTCs 2.5A

Indicators (LED)

Red LEDs Outputs are triggered (relays energized)

Blue LED FACP disconnect is triggered

Individual voltage LEDs:
Green: 12VDC
Red: 24VDC

Voltage Regulator (VR10):

Input

Voltage 24VDC from eFlow104NB

Output

Voltage 12VDC

Current 10A continuous
Other Surge suppression

Indicators (LED)

Input 24VDC is present

Output Powered

Dual Input Power Distribution Module (PDS8CB):

Input

Voltage 24VDC from eFlow104NB and

12VDC from VR10

Input PTCs 9A

Outputs

Voltage 12VDC and/or 24VDC Any of the eight (8) power outputs are selectable

to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output PTCs 2.5A

Indicators (LED)

DC Output Eight (8) individual output LEDs

Green: 12VDC Red: 24VDC

T2CRK7F8SD Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies.

Please refer to the corresponding Sub-Assembly Installation Guides

for further information

CE European Conformity

Physical and Environmental Dimensions (H x W x D)

Enclosure: 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm). Shipping: 32.5" x 26.5" x 11.125" (826mm x 673mm x 283mm)

Weight (approx.)

Product 49.8 lb. (22.59 kg). Shipping 53.55 lb. (24.29 kg).

Temperature

Operating 0°C to 49°C (32°F to 120°F). Storage -20°C to 70°C (-4°F to 158°F).

Relative Humidity 85% +/- 5%. BTU/Hr (approx.): 77 BTU/Hr.




Access & Power Integration Solution for Rhombus



Access Controller Position Chart for the Following Models:

Altronix/Rhombus	Pem Mounting
DC20M	A

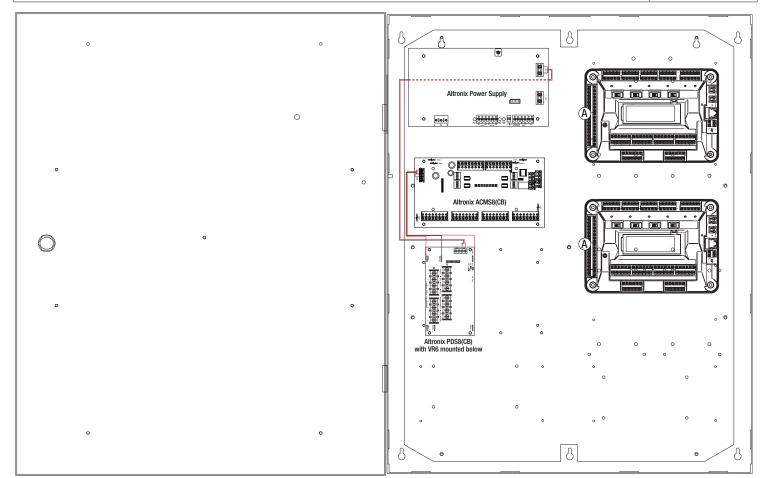



T2CRK7F8SD (Kit) —

Access & Power Integration Solution for Rhombus



Accessories (order separately)



LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.

These are ideal for wire management in our Trove series.



MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR10, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.



Trove2BWC with wires



TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.



T2CRK7F8SD (Kit)

Access & Power Integration Solution for Rhombus



Dimensions and Drawing -

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

